

Build A Bathroom Anywhere!

Qwik Jon[®] Ultima

Economical Sewage Systems

**Designed for free-standing
or built-in installations**



100% factory tested

Features:

- Preassembled pump and tank for easy installation
- No need to destroy concrete floors
- Designed to accommodate a toilet, lavatory, bathtub and/or shower
- 1" diameter discharge (can be reduced to 3/4" to replace existing systems)
- Contains 1/2 HP (0.7 kW) grinder pump
- Designed, Machined & Assembled in USA

ZOELLER[®]
PUMP COMPANY

Trusted. Tested. Tough.[®]

zoellerpumps.com 800-928-7867
3649 Cane Run Road, Louisville, KY 40211 USA



FM3063
0420
Supersedes
0319

U.S. Patent Nos.
7,203,976; 9,352,327;
8,562,287
Canadian Patent No.
2,512,023






SEWAGE REMOVAL SYSTEM

Models 202, 203, 204 Qwik Jon® Ultima
Designed to accommodate a toilet, lavatory, bath tub and/or shower.

PRODUCT SPECIFICATIONS

MOTOR	Horse Power	1/2
	Voltage	115
	Phase	1 Ph
	Hertz	60 Hz
	RPM	3450
	Type	Permanent split capacitor
	Insulation	Class B
	Amps	7.0 - 10.5
PUMP	Operation	Automatic
	Discharge Size	1"
	Solids Handling	Grinder
	Cord Length	9' (3 m) standard
	Cord Type	UL listed neoprene cord and plug
	Certification	cCSAus (pump only)
	Max. Head	30' (9.1 m)
	Max. Flow Rate	45 GPM (17 LPM)
	Max. Operating Temp.	130 °F (54 °C)
	Cooling	Oil filled
MATERIALS	Motor Protection	Auto reset thermal overload
	Cap	Engineered plastic
	Motor Housing	Cast iron
	Pump Housing	Engineered plastic
	Tank	ABS
	Upper Bearing	Ball bearing
	Lower Bearing	Ball bearing
	Mechanical Seals	Carbon/ceramic
	Impeller Type	Non-clogging vortex
	Impeller	Engineered plastic
	Hardware	Stainless steel
	Motor Shaft	AISI 1215
	Gasket	Closed cell tank gasket; Buna-N pump o-rings

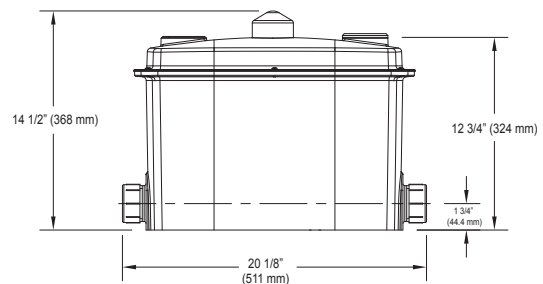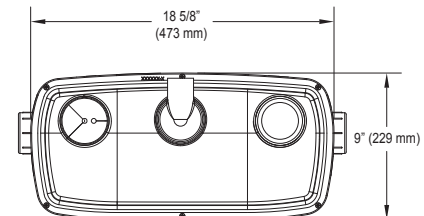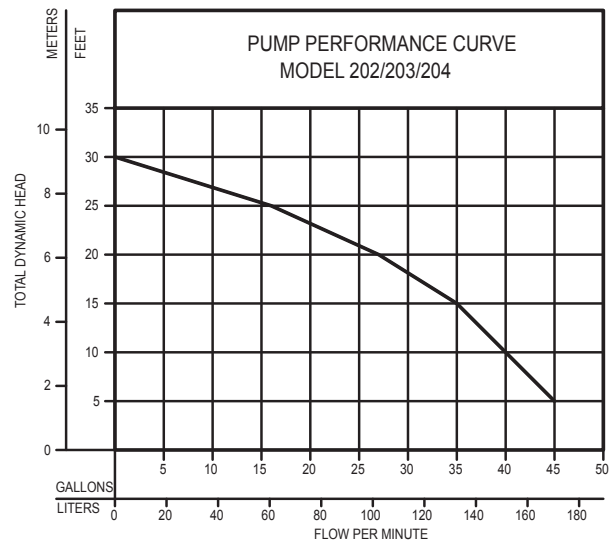

ZOELLER
PUMP COMPANY

