

## Promenade® II Close Coupled Toilet, 1.28GPF

### FEATURES

- Tornado Flush™ system, high-efficiency (1.28GPF/4.8LPF)
- CEFIONTECT® glaze prevents debris from sticking to ceramic surfaces, making them easier to clean
- ADA Compliant
- Universal Height
- Two-piece decorative high-profile toilet
- Chrome trip lever
- 12" Rough-in

### MODELS

- CST404CEFG (#01, #03, #11, #12)  
With CEFIONTECT ceramic glaze
- CST404CEF (#51)  
Without CEFIONTECT
- CST404CEFRG (#01)  
With CEFIONTECT and right-hand trip lever

### COMPONENTS

- C404CUFG  
Elongated bowl with CEFIONTECT
- C404CUF  
Elongated bowl without CEFIONTECT
- ST403E  
Tank and cover only
- ST403ER  
Tank with right-hand trip lever and cover only
- SS224  
SoftClose® seat (sold separately)

### COLORS/FINISHES

- Standard
  - #01 Cotton
  - #03 Bone
  - #11 Colonial White
  - #12 Sedona Beige
  - #51 Ebony (without CEFIONTECT)

### PRODUCT SPECIFICATION

The two-piece high-efficiency Tornado Flush system toilet shall be 1.28GPF/4.8LPF. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be universal height and ADA compliant when approached from trip lever side. CST404CEFG model shall have CEFIONTECT ceramic glaze. Toilet shall be TOTO Model CST404CEF\_\_\_\_\_.



**Tornado Flush**



**Universal Height**



**CEFIONTECT**



**ADA Compliant**

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, Buy American Act (BAA)
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



# CST404CEF(G)

## Promenade® II Close Coupled Toilet, 1.28GPF


### SPECIFICATIONS

<b>Water Use</b>	1.28 GPF/4.8LPF
<b>Flush System</b>	Tornado Flush
<b>Min. Water Pressure</b>	8 psi (static)
<b>Water Surface</b>	9" x 6-3/4"
<b>Trap Diameter</b>	2-1/8"
<b>Rough-in</b>	12"
<b>Trap Seal</b>	2-1/4"
<b>Warranty</b>	One Year Limited Warranty
<b>Material</b>	Vitreous china
<b>Shipping Weight</b>	C404CUF(G) - 60 lbs ST403E - 31.5 lbs
<b>Shipping Dimensions</b>	C404CUF(G) 29-3/4"L x 14-3/4"W <sup>1</sup> x 12"W <sup>2</sup> x 17-1/2"H ST403E 18"L x 9"W x 16"H


### INSTALLATION NOTES

#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

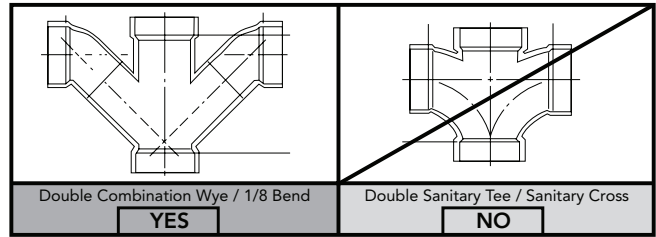

### DIMENSIONS

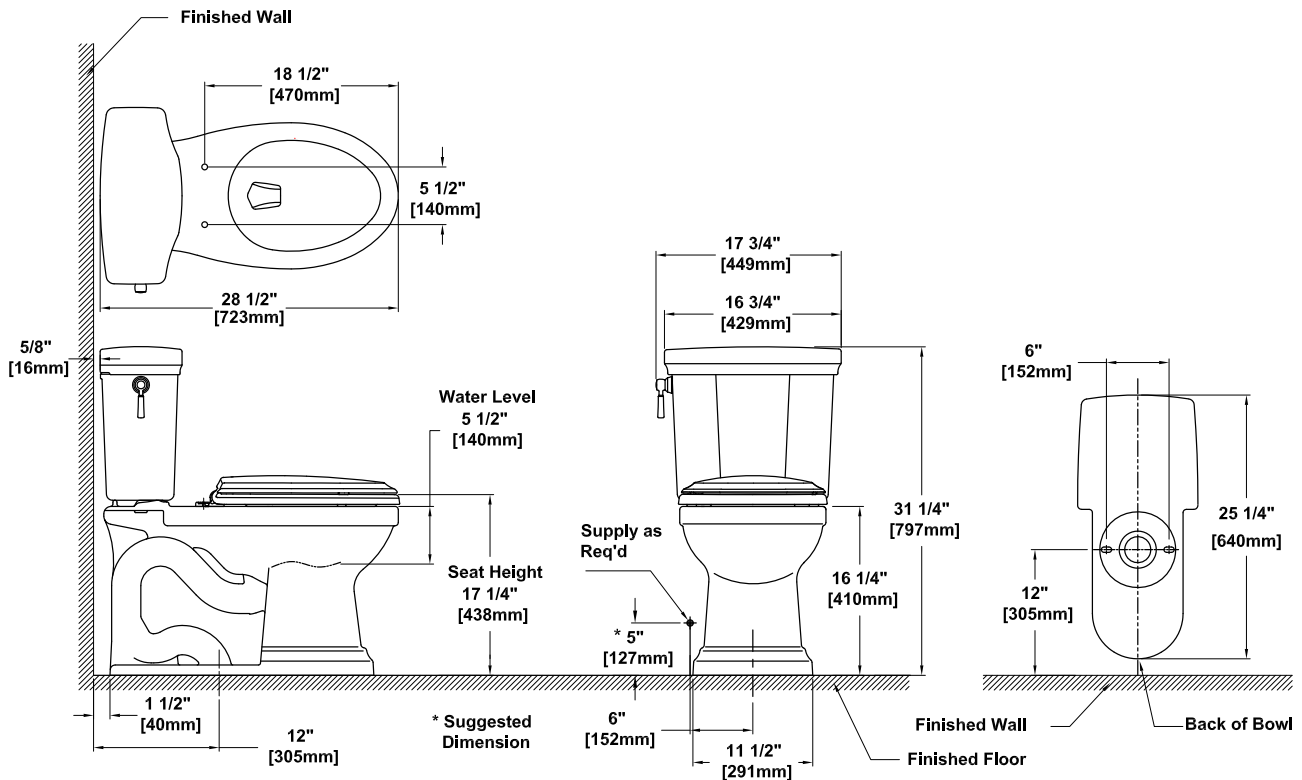

**TOTO**

*These dimensions and specifications are subject to change without notice*